

NOTE:

NUMBER OF PATCH PANELS & WIREMINDERS MOUNTED ON SWING GATE WILL VARY DEPENDING ON NUMBER OF STATION TERMINATIONS EACH TERMINAL IS REQUIRED TO SUPPORT. THIS DRAWING IS TYPICAL.

19" 8-PIN 48-PORT CATEGORY 5e PATCH PANELS WITH RJ-45 110-STYLE JACKS MEETING EIA/TIA-568A STANDARDS. (SEE SPECS. 2.8 & 3.8.4)


WIREMINDER (SPEC. 2.8.2)

19" 8-PIN 48-PORT CATEGORY 5e PATCH PANELS WITH RJ-45 110-STYLE JACKS MEETING EIA/TIA-568A STANDARDS. (SEE SPECS. 2.8 & 3.8.4)

WIREMINDER (SPEC. 2.8.2)

19" 8-PIN 48-PORT CATEGORY 5e PATCH PANELS WITH RJ-45 110-STYLE JACKS MEETING EIA/TIA-568A STANDARDS. (SEE SPECS. 2.8 & 3.8.4)

WALL MOUNTED SWING GATE (SEE SPECS. 2.7, 3.8.2 & 3.8.3)

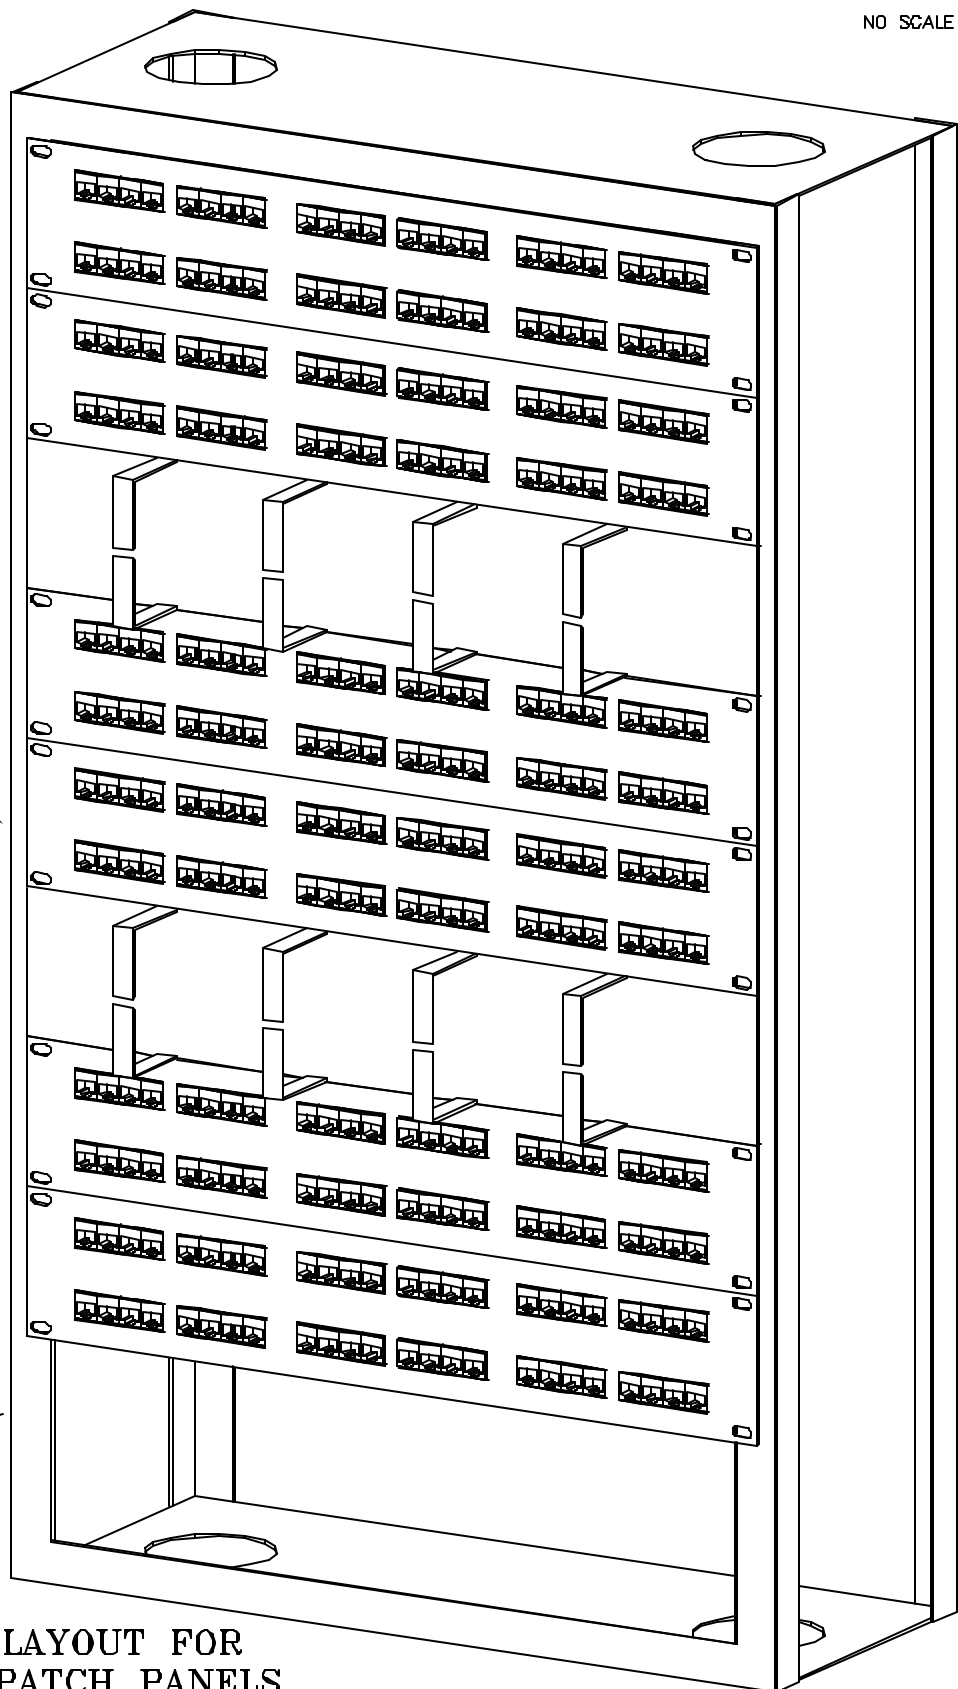

TYPICAL SWINGGATE LAYOUT FOR CATEGORY 5e 110 PATCH PANELS

Work Order	Posted By	Date	Work Description	<i>UNIVERSITY of CALIFORNIA SANTA BARBARA</i>	
				Dept: COMMUNICATIONS SERVICES	Drawn By: DBOOTH
				Date: 4/17/00	DWG Notes:
				Title:	DWG Notes:
				File Name: 110SWING	Checked by: T. ST. CLAIR